

Roof Outlets

Vertical Spigot Outlets




Caroflow Vertical Spigot roof outlets are available in either LM6 Aluminium Silicon casting alloy to BS EN 1706:2010 for most roof finishes or in leaded gunmetal to BS EN 1982:2008 for use with lead or copper-clad roofs or for connection to copper pipework. Foam insulation coating can be applied to both aluminium and gunmetal vertical spigot outlets for 'warm-roof' installation.

Performance and Connections see page 19.

Suitable for connection to:


- PVC (50/VS will not connect directly – use heat shrink adaptor or flexible coupling)
- Aluminium
- Cast iron
- Copper (gunmetal only)

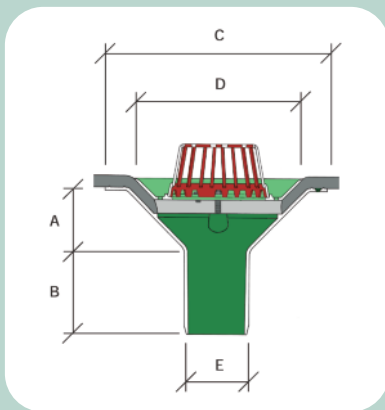


Order Code	50/VS	75VS	100/VS	150/VS
Pipe size (nom)	50	75	100	150
A	92	92	110	85
B	108	108	135	160
C	300	300	380	380
D	250	250	305	305
E	60	83	110	160

Example specification


100mm nominal bore CAROFLOW Vertical Spigot aluminium (or leaded gunmetal) rainwater outlet with domical grating Code 100/VS (100/VS/F for flat grate option) as manufactured by Caroflow Limited
Tel: 01763 244446.

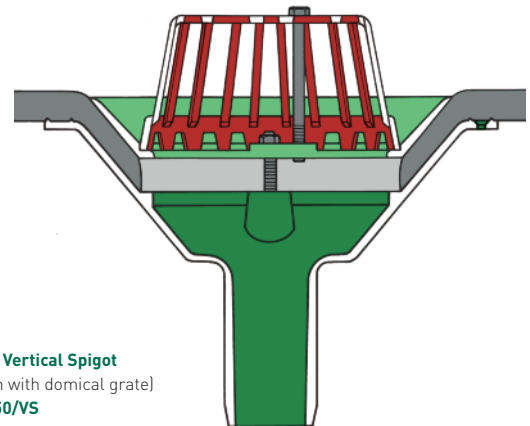


50mm Vertical Spigot
(shown with domical grate)
Code 50/VS

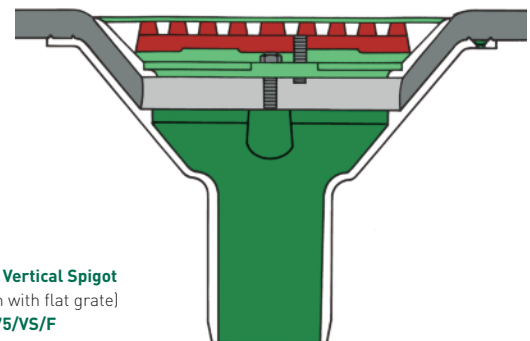

75mm Vertical Spigot
(shown with flat grate)
Code 75/VS/F

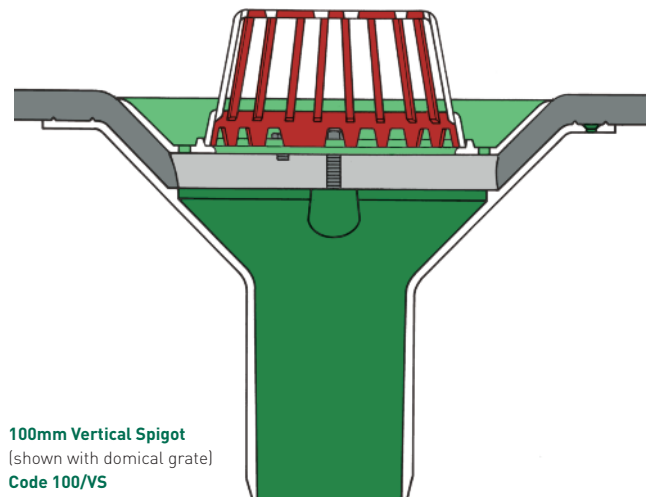

100mm Vertical Spigot
(shown with domical grate)
Code 100/VS

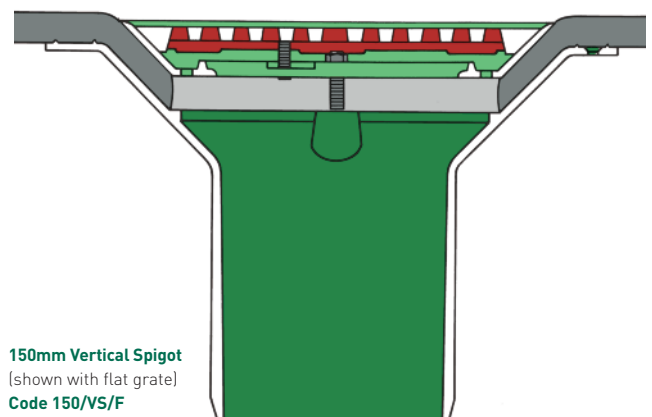

150mm Vertical Spigot
(shown with flat grate)
Code 150/VS/F

All drawings above are shown 1:5 scale