



Product Data Sheet

Floradrain® FD 25-E

Order No. 3028

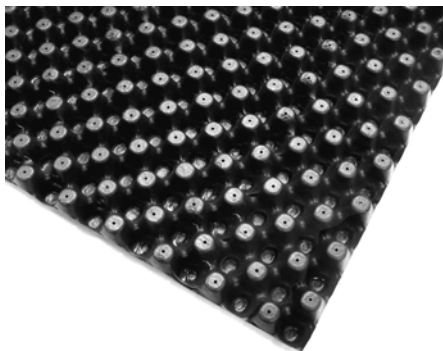

Pressure resistant drainage and water storage element of recycled polyolefin for use on extensive green roofs.



Technical Data

Floradrain® FD 25-E

Drainage and water storage element of thermoformed recycled polyolefin.

Material: Polyolefin, mainly PE
 Colour: dark grey
 Height: ca. 25 mm
 Weight: ca. 1.6 kg/m²

Diffusion opening: ca. 2 mm
 Water storage capacity: ca. 3 l/m²
 Filling volume: ca. 10 l/m²

Max. compressive strength (without filling): ca. 270 kN/m²

In-plane water flow capacity (EN ISO 12958):

roof slope 1 %: ca. 0.59 l/(s·m)
 roof slope 2 %: ca. 0.85 l/(s·m)
 roof slope 3 %: ca. 1.05 l/(s·m)

Dimensions: ca. 1.00 x 2.00 m

Accessories:


Plastic Connector Order No. 9620
 (to be pressed into diffusion openings)

Features

- tested drainage capacity
- above the German Standard DIN 4095
- proven longterm reliability
- water storage, even on sloped roofs
- walkable
- low profile height and light weight
- biologically neutral
- quick and easy installation
- joint connector as accessory available

Application Example

“Extensive Green Roof Type Rockery Type Plants according to ETA-13/0668”

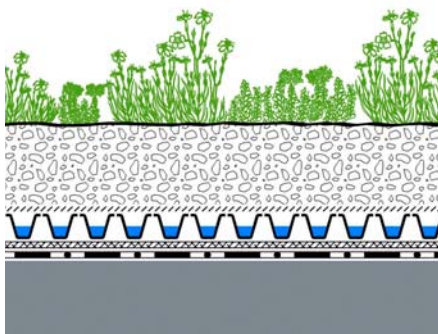

Plant layer
 “Rockery Type Plants”

System Substrate “Rockery Type Plants”

Filter Sheet SF

Floradrain® FD 25-E

Protection Mat SSM 45

Roof construction with
 root resistant waterproofing



Specification Suggestion

Drainage and water storage element made of recycled polyolefin, height ca. 25 mm, pressure resistance ca. 270 kN/m², water storage cells and openings for aeration and evaporation as well as multidirectional drainage channel system on underside, in-plane water flow capacity tested according

to EN ISO 12958, delivery and installation according manufacturer's instructions.

Make: ZinCo Floradrain® FD 25-E
 Enquiries: ZinCo Green Roof Systems Ltd.
 Phone: +44 (0)1223 853843

